


**HEAT SHRINKABLE CABLE ACCESSORIES**


DESCRIPTION OF TYPE

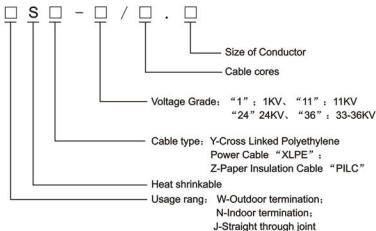


Size of Conductor: "0" : 10-16mm<sup>2</sup>;  
"1" : 20-50mm<sup>2</sup>;  
"2" : 70-120mm<sup>2</sup>;  
"3" : 150-240mm<sup>2</sup>;  
"4" : 300-500mm<sup>2</sup>.

Cable cores: From 1C to 5C.

For example:  
"WSY-11/3.1" : 11KV "XLPE" cable  
Heat-shrinkable outdoor termination:  
three cores, Size of Conductor is 25-50mm<sup>2</sup>.

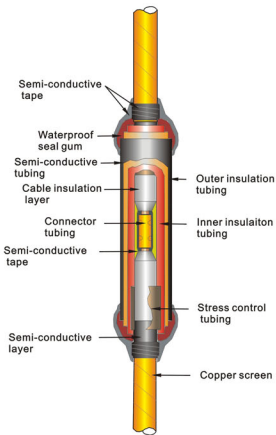

Single-core heat shrinkable straight through joint

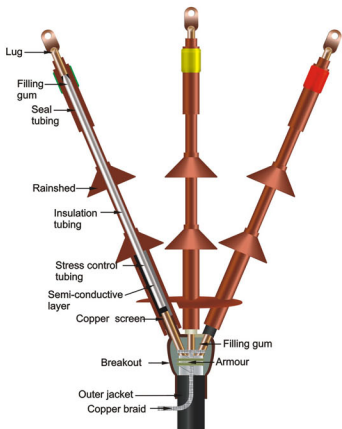

3-cores heat shrinkable outdoor termination

## LV HEAT SHRINKABLE CABLE ACCESSORIES



**L.V 5-cores heat shrinkable straight through joint kit**



**L.V 4-cores heat shrinkable termination kit**



**L.V 4-cores heat shrinkable termination kit**

### Technical Data (0.6/1KV)

Property	Typical data	Property	Typical data
Hardness	80(Shoea A)	Ac voltage withstand	2.5kV
Tensile strength	12Mpa	Shrink temperature	120-140℃
Elongation at break	300%	Shrink ration (dia)	250%
Dielectric strength	≥20KV/mm	Longitudinal shrinkage	±5%

Dimension(mm)

Description of Goods	Specification	Size of Conductor (mm <sup>2</sup> )	Description of Goods	Specification	Size of Conductor (mm <sup>2</sup> )
2-cores termination kits	SY-1/2.0	10-16	2-cores straight through joint	JSY-1/2.0	10-16
	SY-1/2.1	25-50		JSY-1/2.1	25-50
	SY-1/2.2	70-120		JSY-1/2.2	70-120
3-cores termination kits	SY-1/3.0	10-16	3-cores straight through joint	JSY-1/3.0	10-16
	SY-1/3.1	25-50		JSY-1/3.1	25-50
	SY-1/3.2	70-120		JSY-1/3.2	70-120
4-cores termination kits	SY-1/4.0	10-16	4-cores straight through joint	JSY-1/4.0	10-16
	SY-1/4.1	25-50		JSY-1/4.1	25-50
	SY-1/4.2	70-120		JSY-1/4.2	70-120
5-cores termination kits	SY-1/5.0	10-16	5-cores straight through joint	JSY-1/5.0	10-16
	SY-1/5.1	25-50		JSY-1/5.1	25-50
	SY-1/5.2	70-120		JSY-1/5.2	70-120
	SY-1/5.3	150-240		JSY-1/5.3	150-240